

MODULO

ACCESS RAMPS


MODULO System

The versatility of Modulo System is best expressed with the creation of access-ramps: using different the heights of Modulo combined the structure is formed quickly and accurately with significant saving of materials.

The ramp can be removed quite easily when it is not needed anymore.

Advantages

- High load bearing capacity structure
- Fast installation
- Material saving
- If necessary, easy to remove
- Can be used for the passage of drains

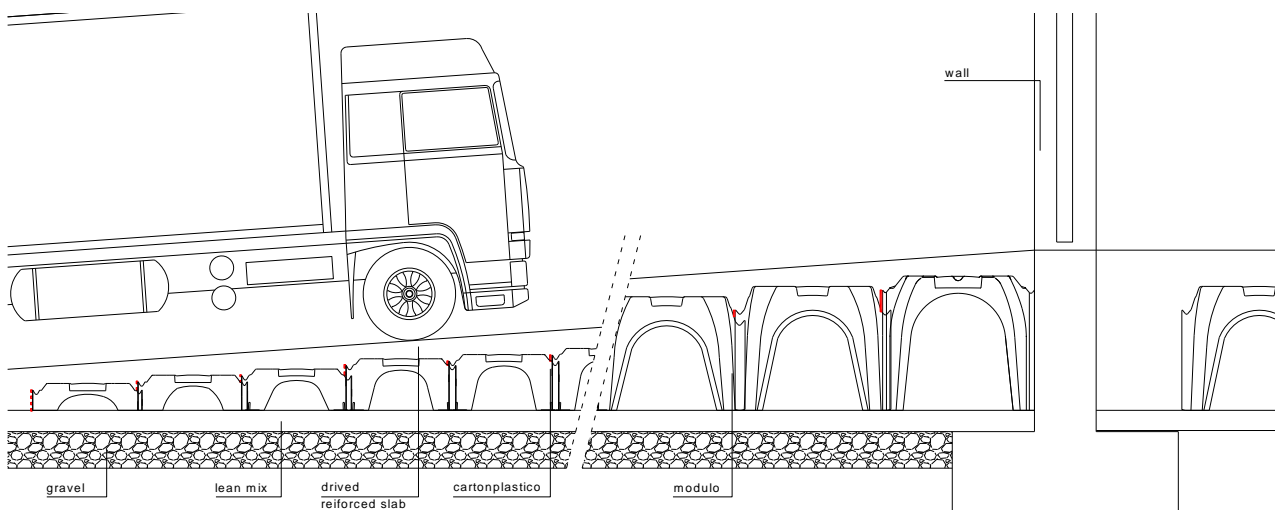

**GENERAL TECHNICAL CHARACTERISTICS
MODULO H13 – H70**

Eurocode category	Imposed + permanent loads [lb/sqin]	Slab [in]	lean mix [in]	Pressure on the ground [lb/sqin]	Minimum amount of reinforcing steel [sqin/ft]	Cover [in]
Cat G Medium vehicles	1.00	3.15	-	83.4	0.119	1
			2	29.6	0.119	1
			2+8	4.3	0.119	1

reference standard for accidental loads is Eurocode.
The calculation was made considering Modulo H70

FIELDS OF APPLICATION:

Ramps connecting different levels.