



DRENING


GREEN AREAS

DRENING

In the case that the surface above the base is used as a green area, DRENING can be placed at a lower depth.
 Transit is only allowed to small maintenance vehicles such as grass mowers.
 Allowed vegetation above and close to the DRENING basin is grass or shrubs with shallow roots, as root intrusion into the basin must be avoided.

Vantaggi

- High water storage capacity
- Complete drainage
- Speed and ease of installation
- Simple logistics and job-site handling
- Shallow dig
- Product made of recycled material

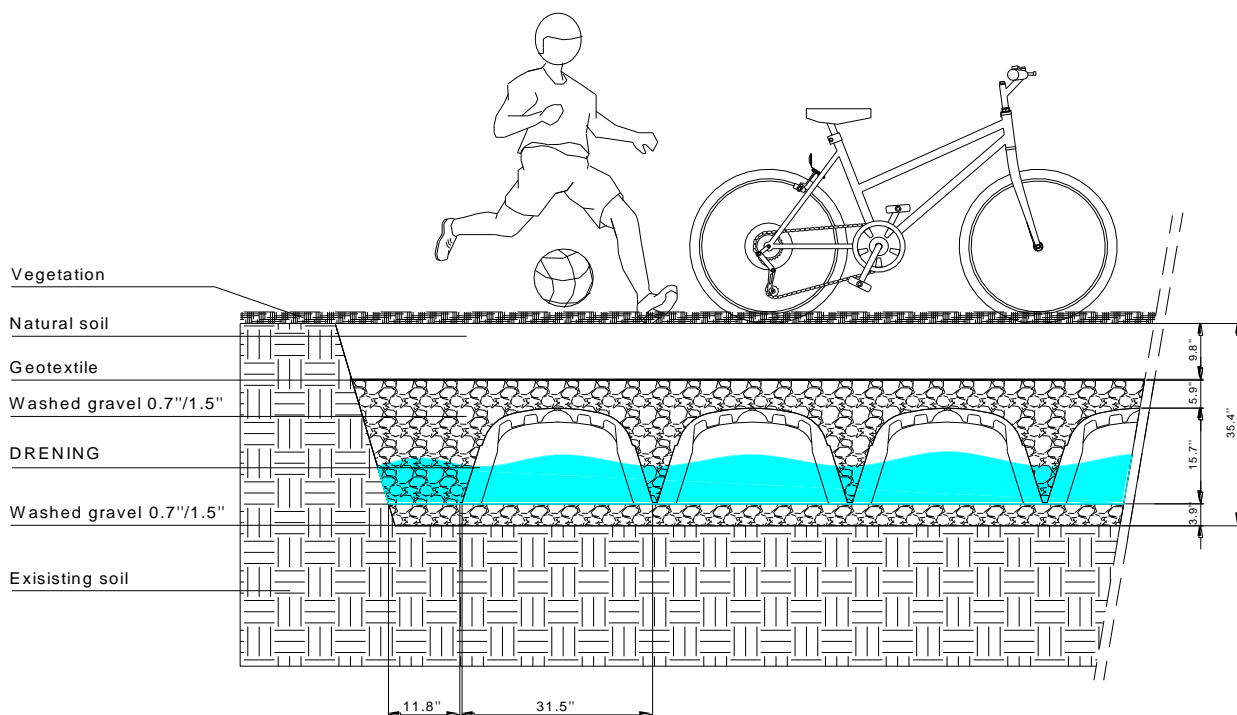

TECHNICAL CHARACTERISTICS

Water storage capacity per DRENING units	9.75 gal/sft
Max. static load	0.35 lb/sqin
Trench depth	35.4 in
Minimum material build-up above DRENING units	15.7 in